

Panasonic

CV-CPW201L

Smart look Day/ Night Vari-Focal Box (Bullet) Camera with IR illuminator



Specifications

Parameter	CV-CPW201L
Camera	
Image Sensor	1/2.9" 2.0 Mega Pixels CMOS
Effective Pixels	1936 (H) x 1097 (V)
Min Illumination	0.02Lux/ F1.4, 0Lux IR on
Electronic Shutter	PAL : 1/25s~1/100,000s NTSC: 1/30s~1/100,000s
Video Frame Rate*	PAL : 25fps NTSC: 30fps
Synchronization	Internal
Day & Night	Auto (ICR)/ Color/ B/W
Max IR Distance	30m
Digital Noise Reduction	2D
White Balance	Auto
AGC	Auto
BLC	Auto
Lens	
Focal Length	2.7-12mm
Angular Field of View	H: 33° (Tele) ~ 96° (Wide) V: 18° (Tele) ~ 51° (Wide)
Lens Type	M12
Input / Output	
Video Output	1CH BNC HD-CVI video output
General	
Power	DC 12V±25%
Power Consumption	2.5W MAX
Working Temperature	-40°C~+60°C. Less than 90% RH (no condensation)
Dimensions	Φ 90.4 mm x 213.0 mm
Weight (approx.)	550g
External Case	Metal


Key Features

- High-performance CMOS image sensor.
- Support 1080p@25fps (PAL)/ 30fps (NTSC)
- Support 75-3 coaxial cable (Belden 9259 or equivalent) transmission up to 500m.
- High speed & long distance real-time transmission.
- Support ICR for day time and night time operation.
- Support auto exposure, auto white balance, auto electronic shutter and auto gain function.
- Support DC12V power supply.
- IP66 compliance.

Standard Accessories

- Quick Guide.....1 pc
- Important Safety Instruction.....1 pc
- Hex Wrench..... 1 pc

Appearance

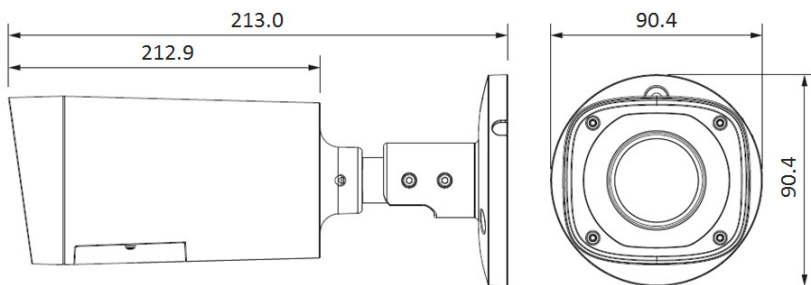

*Refer to DVR spec sheet for recording frame rate limitation

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY:

Lintas Sarana Telekomunikasi
 Jl. Salih Jikun No.15 Perigi, Pondok Aren, Tangerang
 Telp. 021 22210366 WA: 0812-8988-3330
www.linstel.co.id